



## Features

- Native Full HD 1080P (1920x1080)
- 2,200 ANSI lumens, 15,000:1 high contrast ratio
- 6-Segment RGBRGB color wheel
- Vertical lens shift adjustment
- Dual HDMI, ISFccc, 10W chamber speaker
- Optional Wireless HD Video kit




## Specifications

Projection System	DLP®
Native Resolution	1080p (1920 x 1080)
Brightness	2,200 ANSI Lumen
Contrast Ratio	15000:1
Display Color	1.07 Billion Colors
Lens	F=2.59-2.87, f=16.88-21.88mm
Aspect Ratio	Native 16:9 (5 aspect ratio selectable)
Throw Ratio	1.15-1.5 (100"@2.5m)
Image Size	60"-180"
Zoom Ratio	1.3:1
Lamp Type	240W
Lamp Mode (Normal/Eco/SmartEco)*	3500/5000/6000 hours
Keystone Adjustment	Manual vertical ± 40 degrees
Lens Shift	Vertical + 10%
Resolution Support	VGA(640 x 480) to WUXGA_RB(1920 x 1200) *RB=Reduced blanking
Horizontal Frequency	15~102KHz
Vertical Scan Rate	23-120Hz
Color Wheel Segment	6-Segment (RGBRGB)
Color Wheel Speed	6X (50Hz)
Compatibility	HDTV Compatibility: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p Video Compatibility: NTSC, PAL, SECAM, SDTV 3D Compatibility: Frame Sequential: Up to 720p Frame Packing: Up to 1080p Side by Side: Up to 1080i/p Top Bottom: Up to 1080p
Interface	Computer in (D-sub 15pin) x 1 Composite video in (RCA) x 1 Component video in x 1 HDMI x 2 Audio in (Mini Jack) x 1 Audio L/R in (RCA) x 1 Audio out (Mini Jack) x 1 Chamber Speaker 10W x 1 USB (Type A) x 1 (5V/1.5A power supply) USB (Type Mini B) x 1 (service) RS232 (DB-9pin) x 1 DC 12V Trigger x 1 IR receiver x 2 (Front & Top)
Dimensions (WxHxD)	14.9" x 4.8" x 10.9" (380.5 x 121.7 x 277 mm)
Weight	7.27 lbs (3.3 kgs)
Power Supply	AC100 to 240 V, 50 to 60 Hz
Power Consumption	Normal 350W, Standby <0.5W
Audible Noise	29/27 dBA (Normal/Economic mode)
Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)
Preset Mode	*** ISF Disabled: Bright / Vivid / Rec. 709 / Game / User 1 / User 2 / (3D) *** ISF Enabled: Bright / Vivid / Rec. 709 / Game / User 1 / User 2 / ISF Night / ISF Day / (3D)**
Accessories (Standard)	Lens Cover, Remote Control w/ Battery, Power Cord, User Manual CD, Quick Start Guide, Warranty Card, DLP 3D Glasses
Accessories (Optional)	Spare Lamp Kit P/N: 5J.JEE05.001 Ceiling Mount P/N: 5J.JAM10.001 3D Glasses P/N: 5J.J9H25.001 Wireless FHD Kit WDP01 P/N: 5J.J9H28.A02
UPC / Part #	8400460-3301-9 / 9H.JEE77.17W
Limited Warranty	1 Years Parts/Labor; 180 days or 500 hours of lamp life

\*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

## Input and Output Terminals

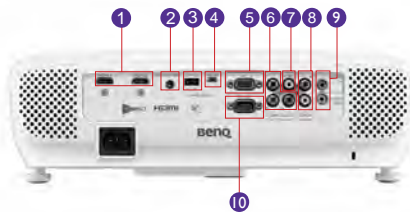

- |                             |                              |
|-----------------------------|------------------------------|
| ① HDMI 1 & 2                | ⑥ Component Video in         |
| ② 12V Trigger               | ⑦ Composite Video in (RCA)   |
| ③ USB (Type A)              | ⑧ Audio L/R in (RCA)         |
| ④ USB (Type mini-B)         | ⑨ Audio In & Out (Mini Jack) |
| ⑤ Computer in (D-sub 15pin) | ⑩ RS232 (DB-9pin)            |



BenQ America Corp.  
www.BenQ.us

BenQ is a registered trademark of BenQ Corp. All rights reserved. Product names, logos, brands, and other trademarks featured or referred to in this material are the property of their respective trademark holders. Specifications subject to change without notice.

HT2050 100115\_BQus



Because it matters